


Topaz Systems, Inc.
Topaz Hardware Installation –Serial LCD Tablets

Topaz Systems, Inc.
650 Cochran Street, Suite 6
Simi Valley, CA, 93065
805 520-8282 (Main)
805 520-0867 fax

Tech support:
805 520-8286
805 520-8287
www.topazsystems.com
support@topazsystems.com


Step 1

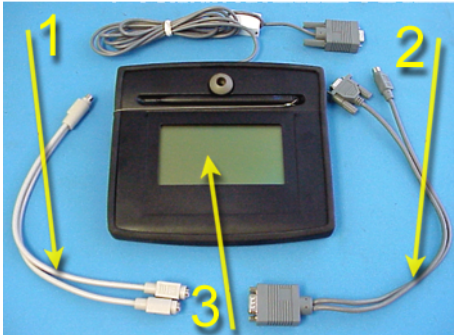

Make sure all of the necessary pieces for hardware installation are included:

1. The PS2 Y power cable
2. The data/serial Y cable
3. The serial LCD tablet


Step 2

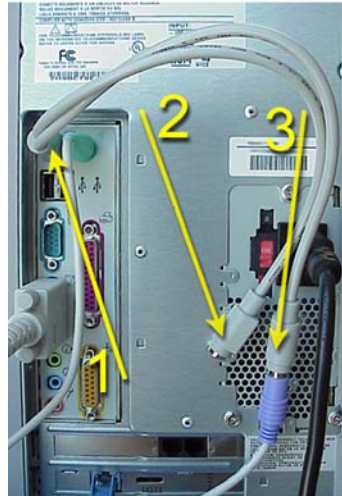

Plug in the PS2 Y power cable:

1. Plug the single end of the cable into either the keyboard (or mouse) jack at the back of the computer, by unplugging the keyboard (or mouse), then plugging in the single end of the Y cable
2. One plug on the double-sided end of the Y cable (it does not matter which) should be left free, to be used later
3. The remaining plug of the double-sided end of the Y cable should be used to re-plug the keyboard (or mouse)


Step 3

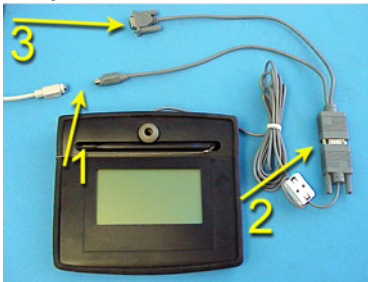

Plug in the serial LCD tablet:

1. Plug the free end of the PS2 cable from the back of the computer to the matched end of the data/serial cable
2. Connect the tablet to the single-plug end of the data/serial cable
3. Plug the serial end on the double-plug end of the d/s cable into the serial port (See Step 4)

Step 4

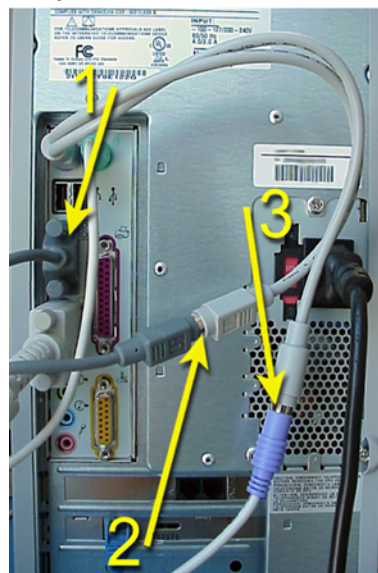

Plug the serial connection into the back of your computer:

1. The remaining end of the data/serial cable should plug into a port of choice in the back of your computer
2. Your computer should now look like this: one end of the PS2 cable plugged into the matched plug of the data/serial cable, and
3. the other end of the PS2 cable plugged into the keyboard (or mouse) port